SCOSCHE®

KA2069

IN-DASH INSTALLATION KIT FOR

SELECT 2005-UP KIA & HYUNDAI VEHICLES

APPLICATIONS	
2007	HYUNDAI ENTOURAGE
2006-UP	KIA SEDONA
2005 1/2-UP	KIA SPECTRA
2005-UP	KIA SPECTRA 5
2007	KIA OPTIMA

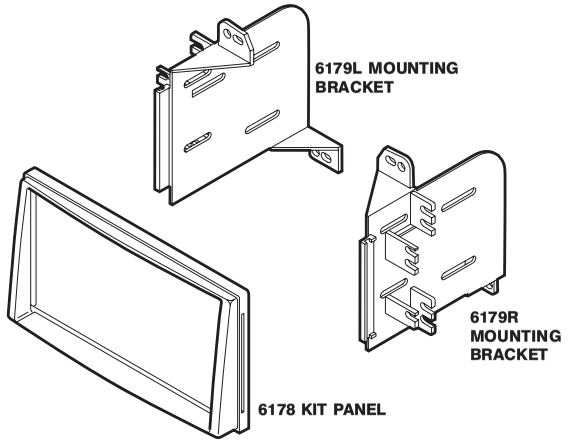

INTRODUCTION / PRELIMINARY

Thank you for purchasing the Scosche KA2069 Kit. This kit was manufactured with the highest of quality standards.

CAUTION:
DISCONNECT YOUR VEHICLE'S NEGATIVE BATTERY TERMINAL BEFORE THE INSTALLATION TO HELP PREVENT ELECTRICAL DAMAGE. WE RECOMMEND THE USE OF A VOLT/OHM METER OVER A TEST LIGHT TO CHECK WIRING. A TEST LIGHT OR GROUNDED WIRE PROBE CAN CAUSE DAMAGE TO THE VEHICLE'S COMPUTER AND/OR DIAGNOSTIC SYSTEMS. AVOID ALL FACTORY AIR BAG WIRING - AIR BAGS CAN ACCIDENTALLY DEPLOY CAUSING SERIOUS INJURY OR DEATH.

NOTES:

- See your vehicle's instructions for any special tools your installation might require.
- Read all instructions accompanying your car stereo/cassette player for proper wiring and mounting instructions.

FACTORY WIRING CODES

CAR STEREO CONNECTORS

PROVIDE EASY CONNECTION OF YOUR CAR STEREO TO FACTORY WIRING HARNESS.

KA02B	HY07B
2003-Up Kia	2005-Up Kia 2006-Up Hyundai

LIABILITY DISCLAIMER

This instruction booklet is based on carefully documented data and research of automobile dash disassembly, wire harness/codes and information pertaining to installation of this kit (KA2069) in 2005-Up Kia and Hyundai Vehicles. Scosche Industries, Inc. can not be held responsible for discrepancies/inconsistencies that may occur due to the automobile manufacturing changes or options, or damage that may occur in the automobile during the installation of components while using this booklet.

If you have any further questions, call our toll free technical help line at: **1-800-621-3695x3**

© 2007 SCOSCHE INDUSTRIES, INC.

SI -03/07 - KA2069 (3000003)

MOUNTING THE RADIO

DOUBLE DIN-ISO & 2 DIN-ISO MOUNT
(DIN-E Radi0 with Side Mounting Holes)

1. Snap the DIN-ISO side mounting brackets to the back of the mounting panel (1 left and 1 right). Use supplied hardware to bolt them to the back of the kit panel.
2. Snap the DIN-ISO trim ring into the radio opening.
3. Load the radio from the REAR of the mounting panel until the nose piece of the radio comes through the front of the kit.
4. Use the 5mm screws to secure the radio from the sides.

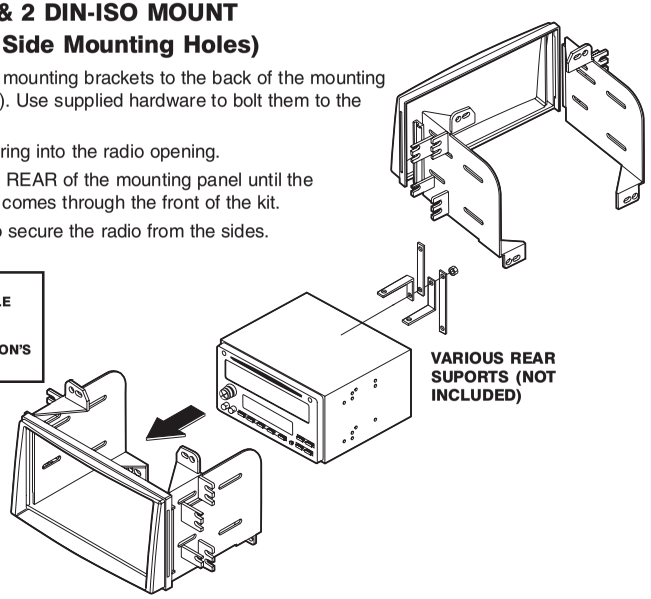

CAUTION:
REAR SUPPORT AVAILABLE SEPARATELY. REAR SUPPORTING THE RADIO ADDS TO THE INSTALLATION'S STRUCTURAL INTEGRITY.

VARIOUS REAR SUPORTS (NOT INCLUDED)

VEHICLE DISASSEMBLY

2007 Hyundai Entourage
2006-Up Kia Sedona

RADIO REMOVAL:

1. Using a panel removal tool, extract the bezel surrounding the shifter.
2. Using a panel removal tool, unsnap the dash bezel surrounding the radio.
3. Extract (1) Phillips Head Screw securing EACH air vent panel.
4. Using a panel removal tool, unsnap and remove air vent panels.
5. Extract (4) Phillips Head Screws securing factory A/C control panel.
6. Extract (4) Phillips Head Screws securing radio to dash.

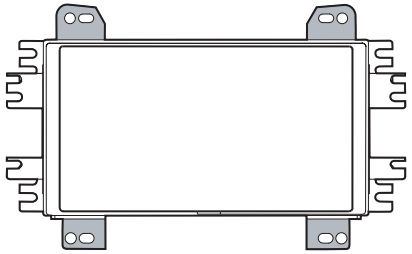

USE SHADED BRACKETS

2007-Up Kia Optima

RADIO REMOVAL:

1. Using a panel removal tool, start from the steering column and unsnap the dash panel surrounding the factory radio.
2. Use a Phillips Head Screwdriver to remove (4) screws securing the factory radio.
3. Lift away, disconnect and remove.

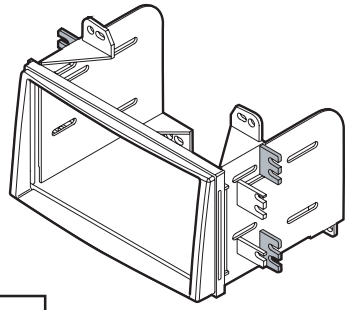

USE SHADED BRACKETS

2005 1/2-Up Kia Spectra
2005-Up Kia Spectra 5

RADIO REMOVAL:

1. Using a panel removal tool, remove the dash panel surrounding the radio. Disconnect and remove.
2. Extract (4) Phillips Head Screws securing the radio to the dash. Disconnect and remove.

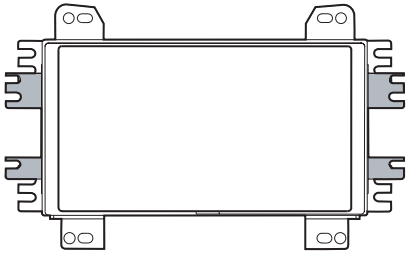

USE SHADED BRACKETS